



Scan QR Code for installation and operation manual



84" SUMMIT OPEN LINEAR LUXURY FIREPLACE

UNIT PHYSICAL DIMENSIONS

Front Width: 90"


Height: 52 3/4"

Depth: 22"

BTUs:


SML-84BR-VEN (NG): 70,000 - 105,000  
 SML-84BR-VEP (LP): 55,000 - 105,000  
 SML-84BRT-VEN (NG): 70,000 - 105,000  
 SML-84BRT-VEP (LP): 55,000 - 105,000

FRONT PHYSICAL DIMENSIONS

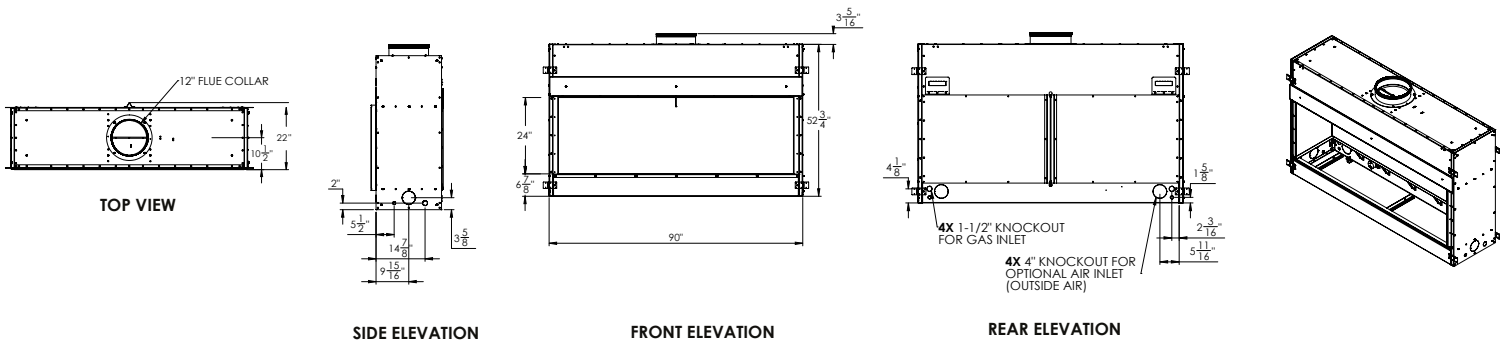

FIREPLACE BURNER OPTIONS

BEDROCK CONTEMPORARY

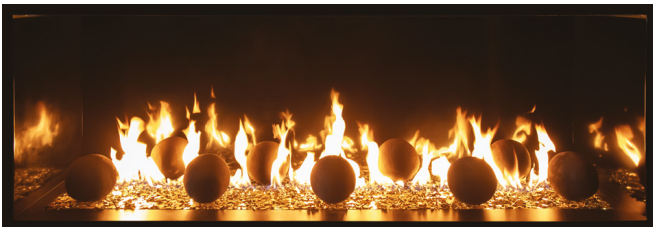

Must add 1/2" reflective glass or lava granules (5 lbs/foot)

— Optional

6" Cannonballs in black, gray, or white

84" Western Driftwood Linear Log Set, 16 pieces

BEDROCK TRADITIONAL WITH GLOWFIRE™ LOGS




Must add 1/2" reflective glass or lava granules (5 lbs/foot)

Driftwood GlowFire™ logs included.

FIREPLACE PANELS




3/8" TEMPERED BLACK GLASS




BLACK MATTE



BLACK FLUTED FIBER



OFFSET BLACK FIBER BRICK



STACKED GRAY FIBER BRICK

VIEWING REDUCTION KIT

Viewing reduction kits are available as an add-on to reduce the viewing area by 6" in height, from 24" to 18" high. The kit included the firebox reduction panel and side drywall stops.


\*If installing as a corner view or bay corner(s), reduction kits are required.

OPTIONAL POWER VENT KIT


Power vent kits are available as an add-on to provide greater flexibility in fireplace placement and vent routing, while ensuring safe and efficient operation.

# FRONT VIEW

## FRAMING DIMENSIONS




<b>Width:</b> 90 <sup>3</sup> / <sub>8</sub> "	<b>Height:</b> 53"	<b>Depth:</b> 22"	<b>Weight:</b> 485 lbs
<b>Bottom to Drywall Stop:</b> 6 <sup>3</sup> / <sub>4</sub> "		<b>Viewing Area:</b> 86 <sup>1</sup> / <sub>2</sub> "	

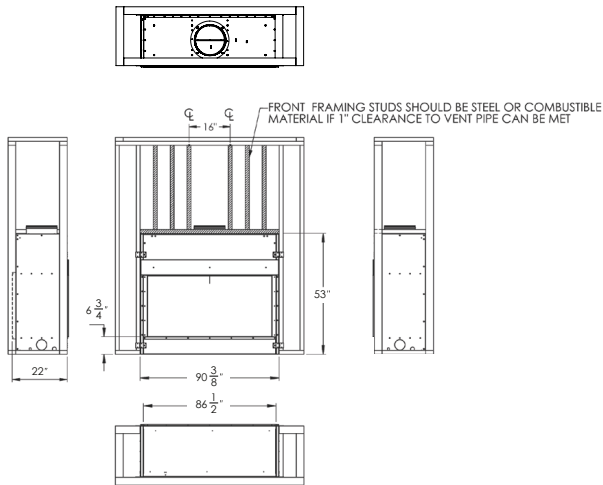


# LEFT VIEW

## FRAMING DIMENSIONS




Reverse for right view

<b>Width:</b> 89"	<b>Height:</b> 53"	<b>Depth:</b> 22"	<b>Weight:</b> 485 lbs
<b>Bottom to Drywall Stop:</b> 6 <sup>3</sup> / <sub>4</sub> "		<b>Viewing Area:</b> 87"	

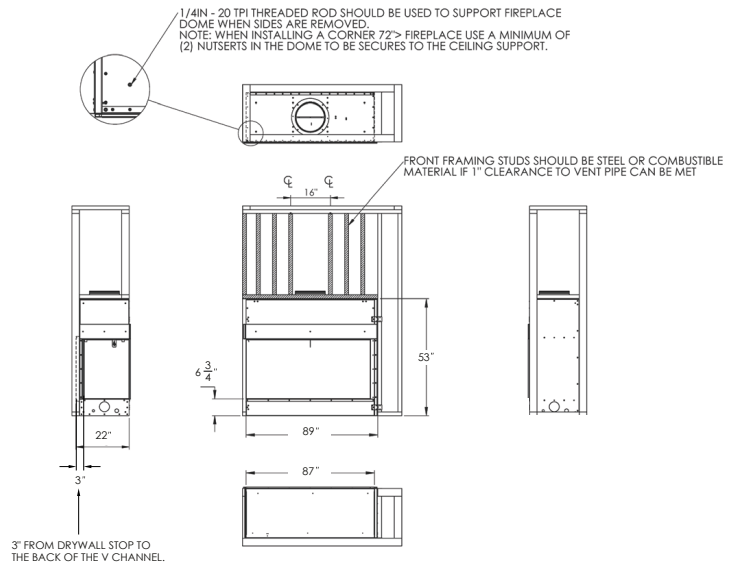


# BAY VIEW

## FRAMING DIMENSIONS




<b>Width:</b> 87 <sup>3</sup> / <sub>4</sub> "	<b>Height:</b> 53"	<b>Depth:</b> 22"	<b>Weight:</b> 485 lbs
<b>Bottom to Drywall Stop:</b> 6 <sup>3</sup> / <sub>4</sub> "		<b>Viewing Area:</b> 87 <sup>5</sup> / <sub>8</sub> "	

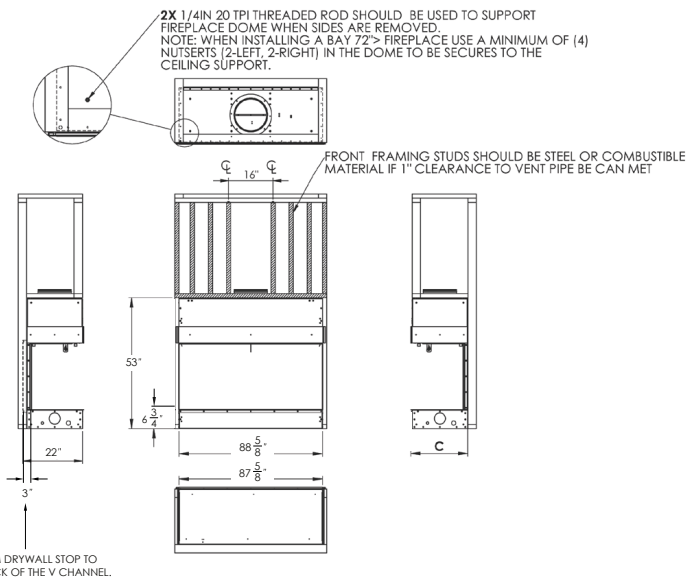


# CORNER VIEW

## FRAMING DIMENSIONS



<b>Width:</b> 90 <sup>3</sup> / <sub>8</sub> "	<b>Height:</b> 53"	<b>Wall to Wall:</b> 133 <sup>3</sup> / <sub>4</sub> "	<b>Weight:</b> 485 lbs
<b>Bottom to Drywall Stop:</b> 6 <sup>3</sup> / <sub>4</sub> "		<b>Viewing Area:</b> 86 <sup>1</sup> / <sub>2</sub> "	<b>Angle Length:</b> 94 <sup>1</sup> / <sub>8</sub> "

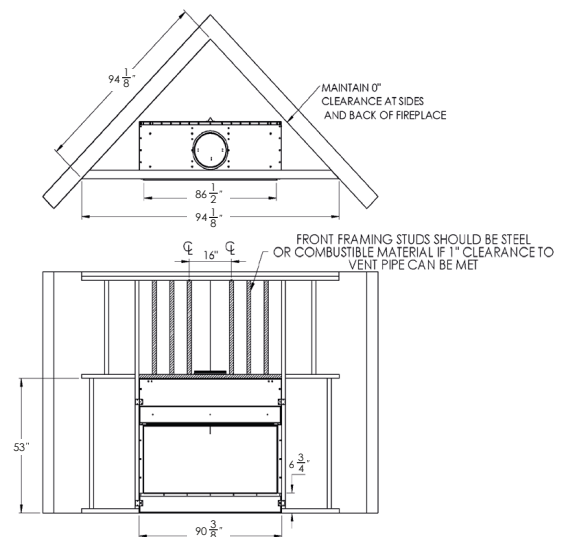

MINIMUM CLEARANCE TO COMBUSTIBLES

Back and sides of fireplaces	0" minimum
Floor	0" minimum
Perpendicular wall to opening	19" minimum
Top of fireplace	0" or top of studs minimum
Chimney outer pipe surface	1" minimum

VENTING

12" B-Vent

\*Minimum Height 14"


\*No more than two 45° offsets

*\*Unless using power vent*

MANTEL CLEARANCES

A combustible mantel shelf may be installed a maximum of 8" (20.3 cm) from the wall.

A combustible mantel shelf may be installed at a minimum of 6" above the opening of the fireplace and a maximum of 8" from the wall.

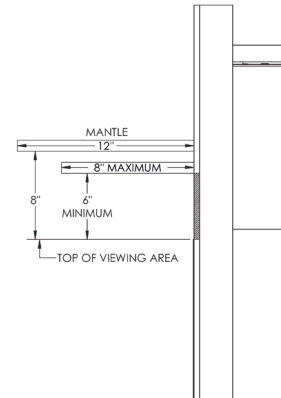

REQUIREMENTS FOR TV INSTALLATION

You can safely place a TV above the Summit fireplace, but the required clearance will depend on the TV manufacturer's guidelines.

When installing a TV 18" above the opening of the fireplace a mantel for heat deflection is required. If installing a TV 18" or more above the opening please refer to the TV manufacturer's required clearances guideline.



PRODUCT CODES

USA	ANSI Z21.50.2019
CAN	CSA 2.22.2019

MAKEUP-AIR REQUIREMENTS

SUMMIT SIZE	CONFIGURATION	CFM
84"	Front View	731
84"	Corner View	903
84"	Bay View	1075

The product information provided is not complete and is subject to change without notice.

To avoid the risk of fire and potential injury, product installation must adhere strictly to instructions contained in the Installation and Operation Manual.