



SUMMIT®

OPEN LUXURY FIREPLACES







Summit Open Luxury Fireplaces is redefining home elegance with innovative fireplace solutions. Our Summit Open Linear Luxury Fireplace is designed with a sleek, modern aesthetic and a variety of customizable features; the Summit series offers a range of installation configurations, panel options, and burner choices, including the Bedrock Contemporary or Bedrock Traditional with Driftwood GlowFire™ Logs

Whether you want to enhance your home's style with a contemporary or traditional look, you can create a custom fireplace that perfectly complements your home's aesthetic.

SIZES 48" 60" 72" 84" 96"

CONFIGURATION OPTIONS

Front View	} <i>all configurable from one SKU</i>
Left Corner	
Right Corner	
Bay	

BURNERS

Bedrock Traditional or Bedrock Contemporary

PANEL OPTIONS

Matte Black | Black Tempered Glass | Black Fluted Fiber
Offset Black Fiber Brick | Stacked Gray Fiber Brick

VENTING 12" B-Vent System

CONTROLS

Multifunction SIT ProFlame II Burner Remote and LED Remote or App for integrated LED light controls

VIEWING AREA

24" Standard — *with the option to reduce the viewing area to 18"*


BEDROCK CONTEMPORARY MODELS



Gray Cannonballs



Concrete Driftwood Logs

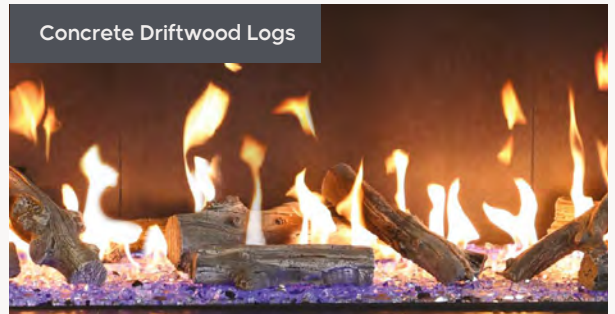

15,000 BTUs per foot

Must add ½" reflective glass (5 lbs/foot) or lava granules

Optional cannonballs or concrete driftwood logs

BEDROCK CONTEMPORARY FIREPLACE BURNER SPECIFICATIONS


NATURAL GAS MODELS

MODEL	RATED	RATED
NG MODELS	High	Low
SML-48BR-VEN	60,000	40,000
SML-60BR-VEN	75,000	50,000
SML-72BR-VEN	90,000	60,000
SML-84BR-VEN	105,000	70,000
SML-96BR-VEN	120,000	80,000


LIQUID PROPANE MODELS

MODEL	RATED	RATED
LP MODELS	High	Low
SML-48BR-VEP	60,000	30,000
SML-60BR-VEP	75,000	40,000
SML-72BR-VEP	90,000	50,000
SML-84BR-VEP	105,000	55,000
SML-96BR-VEP	120,000	60,000

BEDROCK TRADITIONAL MODELS

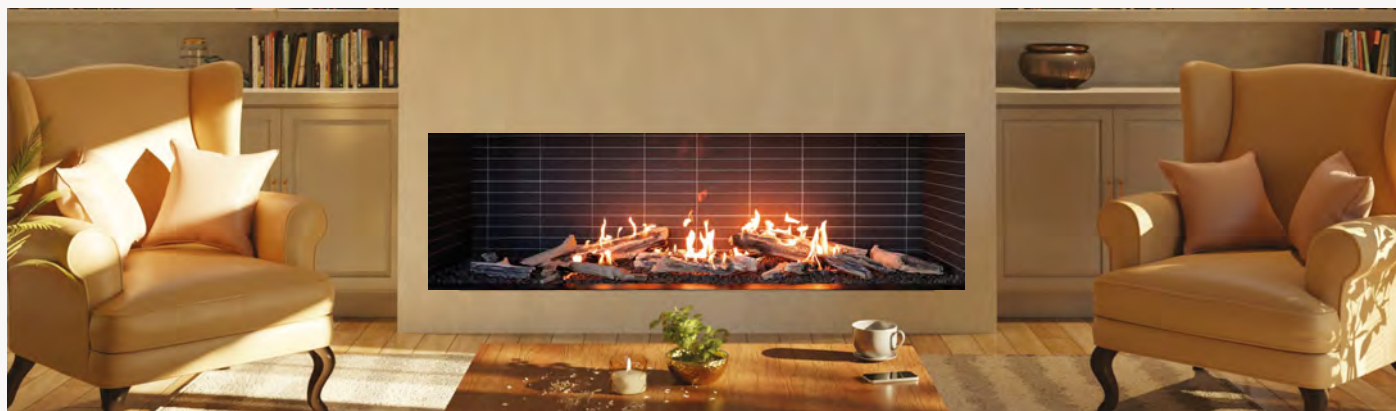

GlowFire™ Logs

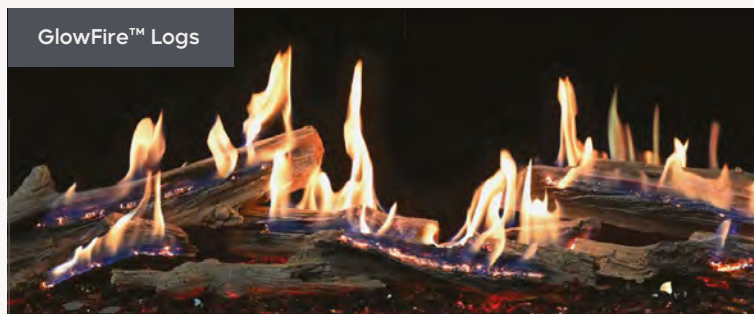

½" Reflective Glass



Driftwood *GlowFire™ logs included

Must add ½" reflective glass
or lava granules (5 lbs/foot)

BEDROCK TRADITIONAL FIREPLACE BURNER SPECIFICATIONS

NATURAL GAS MODELS

MODEL	RATED	RATED
NG MODELS	High	Low
SML-48BRT-VEN	69,000	45,000
SML-60BRT-VEN	95,000	60,000
SML-72BRT-VEN	95,000	60,000
SML-84BRT-VEN	105,000	70,000
SML-96BRT-VEN	120,000	80,000

LIQUID PROPANE MODELS

MODEL	RATED	RATED
LP MODELS	High	Low
SML-48BRT-VEP	62,000	30,000
SML-60BRT-VEP	85,000	40,000
SML-72BRT-VEP	85,000	40,000
SML-84BRT-VEP	105,000	55,000
SML-96BRT-VEP	120,000	60,000



FRONT



BAY




RIGHT CORNER



LEFT CORNER

LIGHTING, CONTROLS, AND ACCESSORIES


SIT PROFLAME II REMOTE — Ignition and flame controls with five flame heights

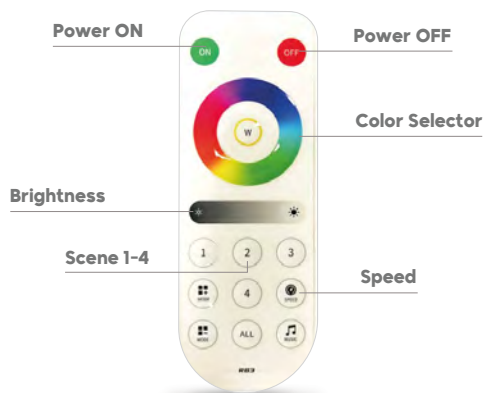


Scene and music customization is available within the app.

Lighting controls available through a remote or an iOS and Android compatible app that allows user to manage LED lighting in the ember bed across the full-color spectrum and halogen downlighting.

FIREPLACE PANELS — Choose from five fireplace panel sets




BLACK MATTE
(Standard)



BLACK TEMPERED GLASS



BLACK FLUTED FIBER



**OFFSET BLACK
FIBER BRICK**



**STACKED GRAY
FIBER BRICK**

6" REDUCTION PANEL KITS

This kit reduces the viewing area height from 24" to 18". It includes the reduction panel and side drywall stops.

OPTIONAL POWER VENT KIT



Although all Summits are designed for natural draft with our standard vent run, there is an optional power-vent that can be easily added to all Summits in the event the standard vent-run can not be met or if the vent needs to terminate horizontally.

FRAME IN SPECIFICATIONS



FRONT VIEW

MODEL	FRAMING DIMENSIONS			BOTTOM TO DRYWALL STOP	VIEWING AREA
	A	B	C	D	E
SML-48XXX-XX	54 3/8"	47"	21 3/4"	6 3/4"	50 7/16"
SML-60XXX-XX	66 3/8"	47"	21 3/4"	6 3/4"	62 7/16"
SML-72XXX-XX	78 3/8"	47"	21 3/4"	6 3/4"	74 7/16"
SML-84XXX-XX	90 3/8"	53"	21 3/4"	6 3/4"	86 7/16"
SML-96XXX-XX	102 3/8"	53"	21 3/4"	6 3/4"	98 7/16"

LEFT CORNER

(Reverse for right corner)

MODEL	FRAMING DIMENSIONS			BOTTOM TO DRYWALL STOP	VIEWING AREA
	A	B	C	D	E
SML-48XXX-XX	54 3/8"	47"	21 3/4"	6 3/4"	50 7/8"
SML-60XXX-XX	66 3/8"	47"	21 3/4"	6 3/4"	62 7/8"
SML-72XXX-XX	78 3/8"	47"	21 3/4"	6 3/4"	74 7/8"
SML-84XXX-XX	90 3/8"	53"	21 3/4"	6 3/4"	86 7/8"
SML-96XXX-XX	102 3/8"	53"	21 3/4"	6 3/4"	98 7/8"

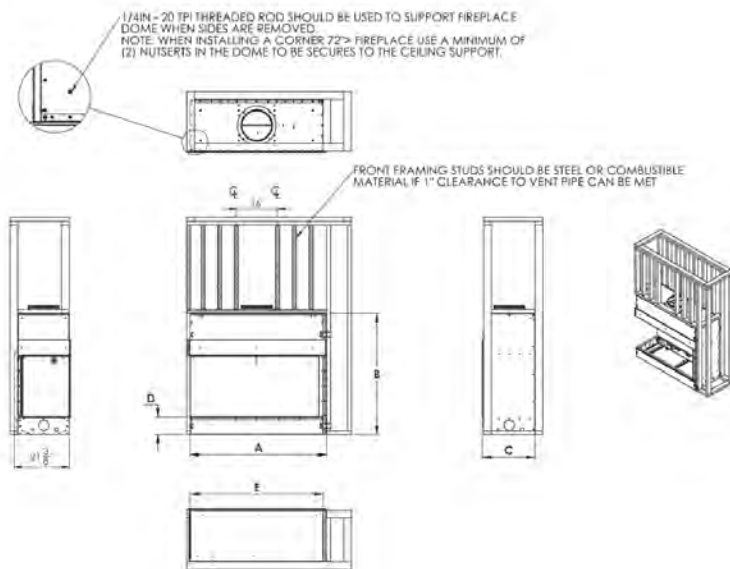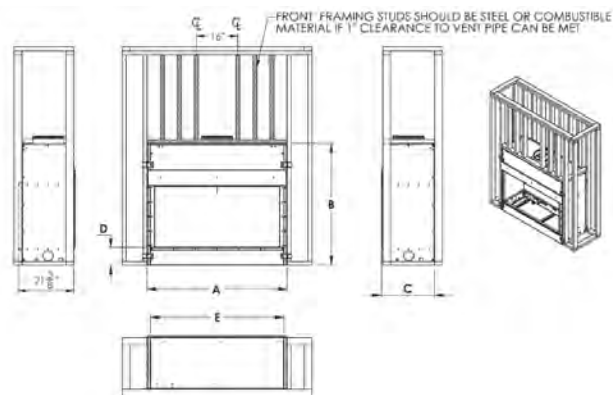

BAY

MODEL	FRAMING DIMENSIONS			BOTTOM TO DRYWALL STOP	VIEWING AREA
	A	B	C	D	E
SML-48XXX-XX	54 3/8"	47"	21 3/4"	6 3/4"	50 7/8"
SML-60XXX-XX	66 3/8"	47"	21 3/4"	6 3/4"	62 7/8"
SML-72XXX-XX	78 3/8"	47"	21 3/4"	6 3/4"	74 7/8"
SML-84XXX-XX	90 3/8"	47"	21 3/4"	6 3/4"	86 7/8"
SML-96XXX-XX	102 3/8"	47"	21 3/4"	6 3/4"	98 7/8"

CORNER

MODEL	FRAMING DIMENSIONS			BOTTOM TO DRYWALL STOP	VIEWING AREA	ANGLE
	A	B	C	D	E	F
SML-48XXX-XX	54 3/8"	47"	97 3/4"	6 3/4"	50 1/4"	68 1/8"
SML-60XXX-XX	66 3/8"	47"	109 3/4"	6 3/4"	62 1/4"	77 1/8"
SML-72XXX-XX	78 3/8"	47"	121 3/4"	6 3/4"	74 1/4"	85 1/8"
SML-84XXX-XX	90 3/8"	53"	133 3/4"	6 3/4"	86 1/4"	94 1/8"
SML-96XXX-XX	102 3/8"	53"	145 3/4"	6 3/4"	98 1/4"	102 1/8"

